


## Machineklemmen SAGOP RP - 80



## Precisie parallel spanklem RP – 80 (SAGOP )

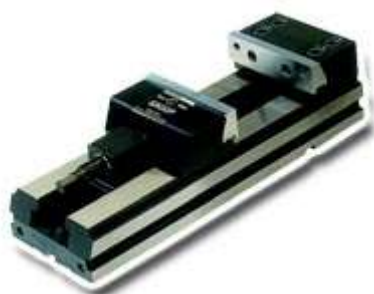


TYPE	Bekbreedte		Bekopening		Max. klemkracht	
	mm.	inch	mm.	inch	tonnes	lbs
0	100	4"	100	4"	2	4400
1	125	5"	130	5"18	2	4400
2A 2B 2C	150	6"	150 200 250	5"7/8 7"7/8 10"	4	8800
3A 3B 3C	200	8"	250 300 350	10" 12" 14"	5	11000
4H 4A 4B 4C	300	12"	280 400 500 600	11" 16" 20" 24"	8	17600

## Precisie parallel spanklem RP – 80 (SAGOP ) in gedeelde uitvoering



## Dubbele precisie parallel spanklem

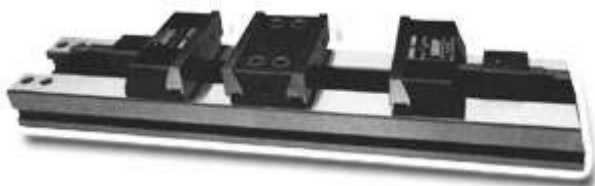

TYPE	Bekbreedte		Bekopening				Max. klemkracht	
	mm.	inch	mm.	inch	mm.	inch	tonnes	lbs
0A 0B 0C	90	3"1/2	266 346 426	10"1/2 13"5/8 16"3/4	80 120 160	3"1/6 4"3/4 6"1/4	2	4400
1A 1B 1C	120	4"3/4	327 407 507	12"7/8 46" 19"61/64	110 150 200	4"5/16 5"7/8 7"7/8	2	4400
2A 2B 2C	150	6"	427 527 627	16"13/16 20"3/4 24"11/16	150 200 250	5"7/8 7"7/8 10"	4	8800

## Precisie parallel spanklem voor horizontale en verticale bewerkingscentrums



TYPE	Bekbreedte		Bekopening		Max. klemkracht	
	mm.	inch	mm.	inch	tonnes	lbs
1	120	4"3/4	180	7"	2	4400
2	150	6"	250	10"	4	8800

**Bijzonder geschikt voor een serie bewerkingscentrums**



TYPE	Bekbreedte		Bekopening		Max. klemkracht	
	mm.	inch	mm.	inch	tonnes	lbs
0	100	4"	100	4"	2	4400
1	125	5"	130	5"1/8	2	4400
1	120	4"3/4	180	7"	2	4400
2	150	6"	250	10"	4	8800



Ref.	Bekbreedte		Bekopening		Max. klemkracht	
	mm.	inch	mm.	inch	kg	lbs
800H	100	4"	80	4"	2000	4400
801H	125	5"	110	5"1/8	2000	4400
802 AH	150	6"	130	5"7/8	4000	8800
802 BH	150		180	7"7/8		
802 CH	150		230	10"		
803 AH	200	8"	230	10"	4000	8800
803 BH	200		280	12"		
803 CH	200		330	14"		
804 HH	300	12"	260	11"	8000	17600
803 AH	300		380	16"		
803 BH	300		480	20"		
803 CH	300		580	24"		